PRINTED: 4/7/2017 2:57:21 PM

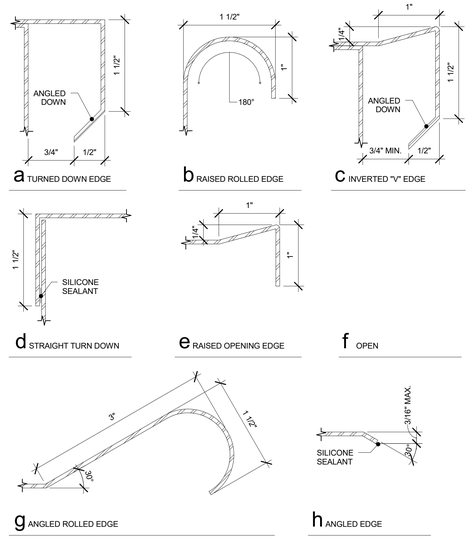

SD-1 TABLE EDGES

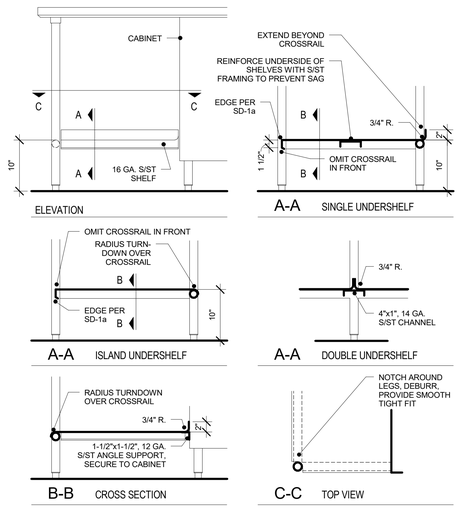

NOTE: 60" MAX. LENGTH FOR ALL SHELF TYPES

SD-2 BACKSPLASHES

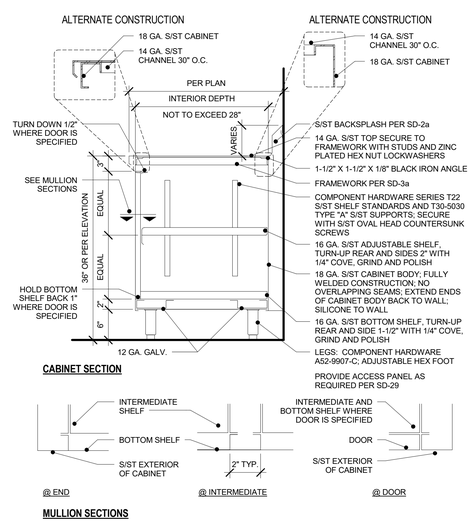

SD-3 FRAMEWORK

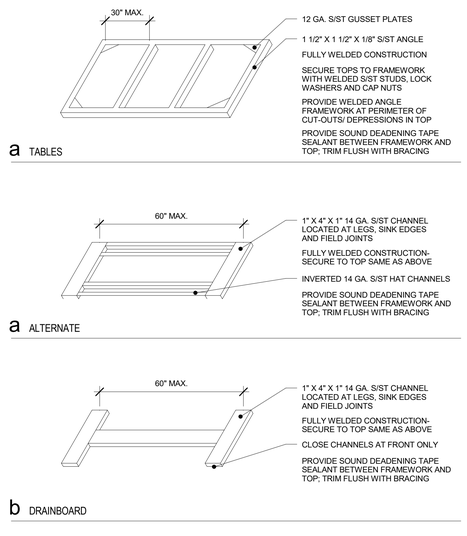

SECTION

GENERAL NOTES PERTAINING TO SINKS:
1. 14 GA. S/ST CONSTRUCTION
2. FULLY WELD SINK TO TOP WITHOUT OVERLAPPING JOINTS
3. ALL WELDED COVED CORNER CONSTRUCTION WITH VERTICAL AND HORIZONTAL CORNERS WITH 3/4" RADIUS
4. SEAT WASTES IN DIE-STAMPED DEPRESSION
5. PITCH SINK TO WASTE OPENING
6. WASTES FURNISHED AND INSTALLED BY FSEC
7. FAUCETS FURNISHED BY FSEC, INSTALLED BY PLUMBING TRADES
8. CONSTRUCT MULTIPLE COMPARTMENT SINKS FROM ONE LARGE SINK; WELD IN DOUBLE-WALL PARTITIONS; 1" SEPARATION BETWEEN PARTITIONS TO FORM FULLY COVED SINK; FULLY WELDED FLUSH FRONT WITH NO INDENTATIONS.
9. ALTERNATE CONSTRUCTION: CONSTRUCT MULTIPLE COMPARTMENT SINKS FROM INDIVIDUALLY FORMED BOWLS; CLOSE OFF FRONT, BOTTOM AND REAR OF SPACES BETWEEN WITH 18 GA. S/ST SINK BANDING.

SD-4 TABLE & SINK LEGS

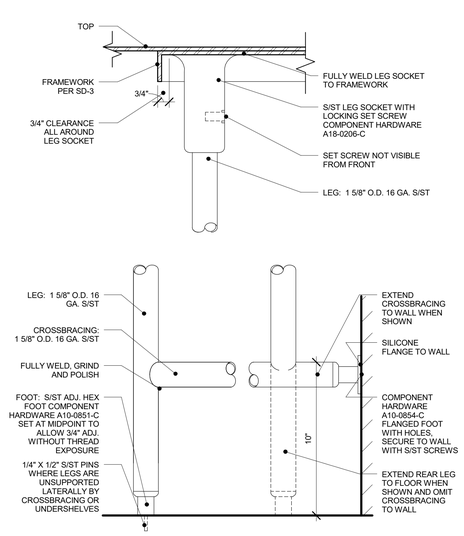

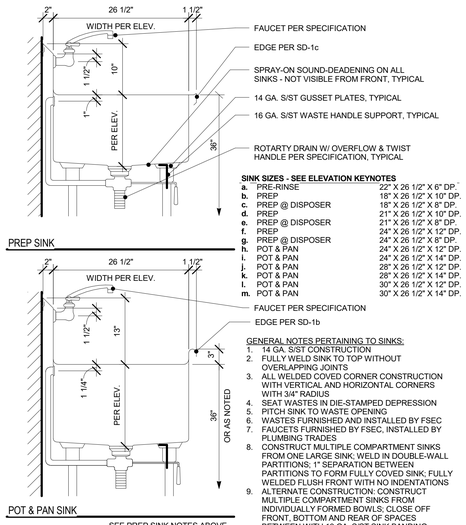

SD-6 REMOVABLE UNDERSHELF

SD-7 CABINET BASE - FULLY WELDED CONSTRUCTION

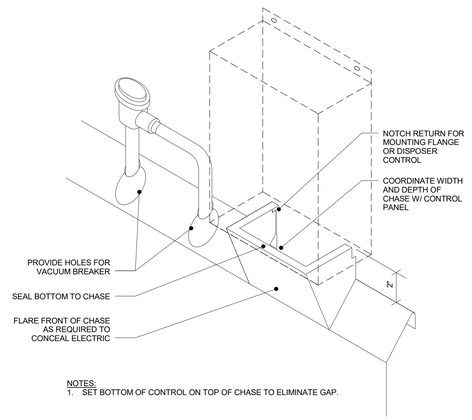

NOTES:
1. SET BOTTOM OF CONTROL ON TOP OF CHASE TO ELIMINATE GAP.

SD-11 DISPOSER CONTROL CHASE

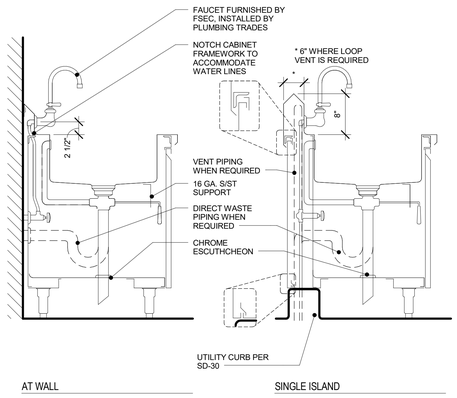

NOTES:
1. WATER AND WASTE PIPING, INCLUDING TAILPIECE, BY PLUMBING TRADES.
2. TWIST HANDLE WASTE WITH OVERFLOW FURNISHED AND INSTALLED BY FSEC.
3. OPENINGS IN CABINET FOR WATER AND WASTE LINES BY FSEC.
4. OPENINGS MUST BE COVERED BY CHROME-PLATED ESCUTCHEONS BY FSEC.
5. VISIBLE HOLES ARE NOT ACCEPTABLE.
6. SHORTEN TWIST HANDLE ON WASTE AS REQUIRED TO CLOSE DOOR.

SD-12 SINK ENCLOSURE - WALL & SINGLE ISLAND

SD-9 SINKS

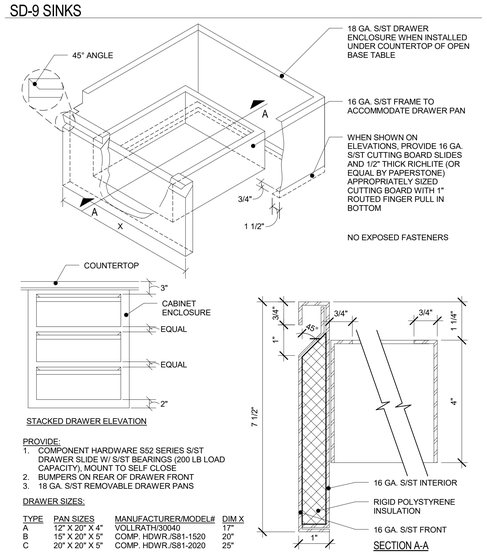

PROVIDE:
1. COMPONENT HARDWARE S52 SERIES S/ST DRAWER SLIDE W/ S/ST BEARINGS (200 LB LOAD CAPACITY), MOUNT TO SELF CLOSE
2. BUMPERS ON REAR OF DRAWER FRONT
3. 18 GA. S/ST REMOVABLE DRAWER PANS

DRAWER SIZES:

TYPE	PAN SIZES	MANUFACTURER/MODEL#	DIM X
A	12" X 20" X 4"	VOLLRATH/30040	17"
B	15" X 20" X 5"	COMP. HDWR./S81-1520	20"
C	20" X 20" X 5"	COMP. HDWR./S81-2020	25"

SD-14 DRAWERS - INTEGRAL PULL

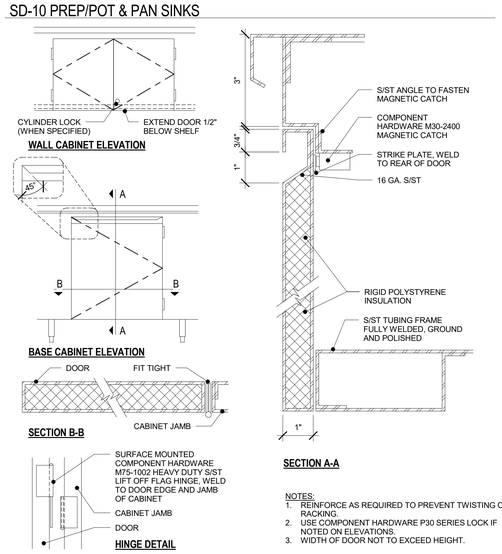

NOTES:
1. REINFORCE AS REQUIRED TO PREVENT TWISTING OR RACKING.
2. USE COMPONENT HARDWARE P30 SERIES LOCK IF NOTED ON ELEVATIONS.
3. WIDTH OF DOOR NOT TO EXCEED HEIGHT.

SD-17 HINGED SOLID DOOR - INTEGRAL PULL

OPN ARCHITECTS
200 5TH AVENUE SE SUITE 201
CEDAR RAPIDS, IA 52401
319-363-6018 PHONE
319-363-7349 FAX
www.opnarchitects.com
opn@opnarchitects.com

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by OPN Architects, Inc. as instruments of service shall remain the property of OPN Architects, Inc. OPN Architects, Inc. shall retain all common law, statutory and other reserved rights, including the copyright thereto.

© 2017 OPN Architects, Inc.

Owner
COLLEGE COMMUNITY SCHOOL DISTRICT
401 76TH AVE SW
CEDAR RAPIDS, IA 52404

Project
PRAIRIE HIGH SCHOOL RENOVATION
401 76TH AVE SW
CEDAR RAPIDS, IA 52404

Civil Engineer
HALL & HALL ENGINEERS
1860 BOYSON RD
HIAWATHA, IA 52233
P. 319-362-9548

Structural Engineer
M2B STRUCTURAL ENGINEERS
422 2ND AVE SE
CEDAR RAPIDS, IA 52401
P. 319-364-0666

Mechanical Engineer
DESIGN ENGINEERS
8801 PRAIRIE VIEW LN SW
CEDAR RAPIDS, IA 52404
P. 319-841-1944

Electrical Engineer
DESIGN ENGINEERS
8801 PRAIRIE VIEW LN SW
CEDAR RAPIDS, IA 52404
P. 319-841-1944

ACOUSTIC CONSULTANT
THRESHOLD ACOUSTICS
141 W JACKSON BLVD #2080
CHICAGO, IL 60604
P. 312-386-1400

FOODSERVICE CONSULTANT
RIPPIE ASSOCIATES
6117 BLUE CIRCLE DR, SUITE 100
MINNEAPOLIS, MN 55343
P. 952-933-0313

CASEWORK CONSULTANT
WYNN O. JONES & ASSOCIATES
P.O. BOX 318
754 ALDERSON STREET
SCHOFIELD, WI 54476
P. 715-359-5196

Key Plan



Sheet Issue Date

100% CD SET	04/07/2017

Previous Issue Dates

100% DD SET	11/11/2016
95% CD SET	03/20/2017

Revision Date

CONSTRUCTION DOCUMENTS

Drawing
FOODSERVICE EQUIPMENT STANDARD DETAILS

OPN Project No. **14277000**

A851